

# ArcPod 15Q

Compact 15x10W RGBW/Fc outdoor IP66 LED wash light for exterior installations  
ORDER CODE: **ARCPD15Q**



**ArcPod 15Q** is a compact exterior wash fixture, featuring high-intensity light despite its small size. The unit is equipped with 15x10W RGBW / FC LEDs, delivering an exceptional output over than 5'900 lumens and a wide gamut of colours and whites. The slim sizing, as well as the wide range of available optics, makes the **ArcPod 15Q** an incredibly flexible architectural fixture to complement the bigger versions in large outdoor installs as accent light or for smaller-sized projects.

## MAIN FEATURES

- Tilt adjustment and multiple lens options for fine focusing
- 15x10W RGBW / FC LEDs
- Compact form factor and fan-free design

## TECHNICAL SPECIFICATION

### LIGHT SOURCE

- Source: 15x10W RGBW / FC LEDs
- Luminous flux: (10°) 4'552 lm; (15°) 5'678 lm; (25°) 5'732 lm; (45°) 5'390 lm @full
- Lux: (10°) 3'116 lx; (15°) 2'790 lx; (25°) 1'203 lx; (45°) 287lx @5 m full
- Source life expectancy: 50.000 hrs (L70 @25° C / 77° F)

### OPTICS

- Beam angle: 25°
- Field angle: 38°
- Lens diameter: 36 mm
- Additional optics: 10° - 15° - 45° (optional)

### COLOUR SYSTEM

- Colour mixing: RGBW / FC
- CCT: CCT control through dedicated DMX channel
- White presets: 2.800 K ~ 10.000 K
- Colour wheel: virtual colour wheel with presets
- Macros: several pre-build macros with adjustable speed

### DYNAMIC EFFECTS

- Static colour mode: selection of static colour

### BODY

- Tilt angle: 0 - 130° with manual regulation
- Body: sturdy die-cast aluminium body
- Body colour: RAL 7012

### CONTROL

- Protocols: DMX512, RDM
- DMX channels: 5 / 7 / 10 channel
- RDM: RDM ready for remote monitoring and settings
- Display: user interface through DATAMASTER external coder (not included)
- Firmware upgrade: yes, via USB - DMX interface (UPBOX1) not included
- Master/Slave: for synchronised operation of more units linked in a chain

### ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Strobe / shutter: 1 ~ 30 Hz, electronic
- Operating temperature: -20° C / +45° C (-4° F / +113° F)
- LED Control: flicker free frequency with adjustable PWM
- Selectable PWM: 600 ~ 25.000 Hz

### ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption: 120W
- Output (at 230V): 14 units on a single power line
- Power factor: >0,97

### PHYSICAL


- Cooling: passive cooling and fan-free
- Adaptors: XLR and Schuko 16A adaptors included
- Signal connection: moulded IP signal IN/OUT connectors
- Power connection: moulded IP signal IN/OUT connectors
- IP rating: 66 for outdoor installations
- IK rating: 08
- Dimensions (WxHxD): 307x259x83 mm
- Weight: 6,3 kg

## ACCESSORIES & RELATED PRODUCTS

- |                       |  |                       |   |
|-----------------------|--|-----------------------|---|
| ▪ S27QLENS10/15/25/45 | 10°/15°/25°/45° lens for SOLAR27Q/48Q, ARCPD15Q/27Q/48Q/96Q (25° included)         | ▪ AWEXAC1L03/05/10/20 | IP67 power extension cable for ARCHWORK projectors, L.03/05/10/20 m |
| ▪ A15QBD              | Black barn door 4 directional flaps to adjust the light beam, ARCPD15Q             | ▪ AWEXDC1L03/05/10/20 | IP67 DMX extension cable for ARCHWORK projectors, L.03/05/10/20 m   |
| ▪ DATAMASTER          | RDM/DMX tool, cable tester, 5p XLR connectors, pouch, charging cable, XLR adaptors | ▪ UPBOX1U             | Firmware uploader kit, USB IN, 3pin XLR DMX OUT, USB OUT            |


**PRESET FULL ON**

Beam angle 50%: 25°

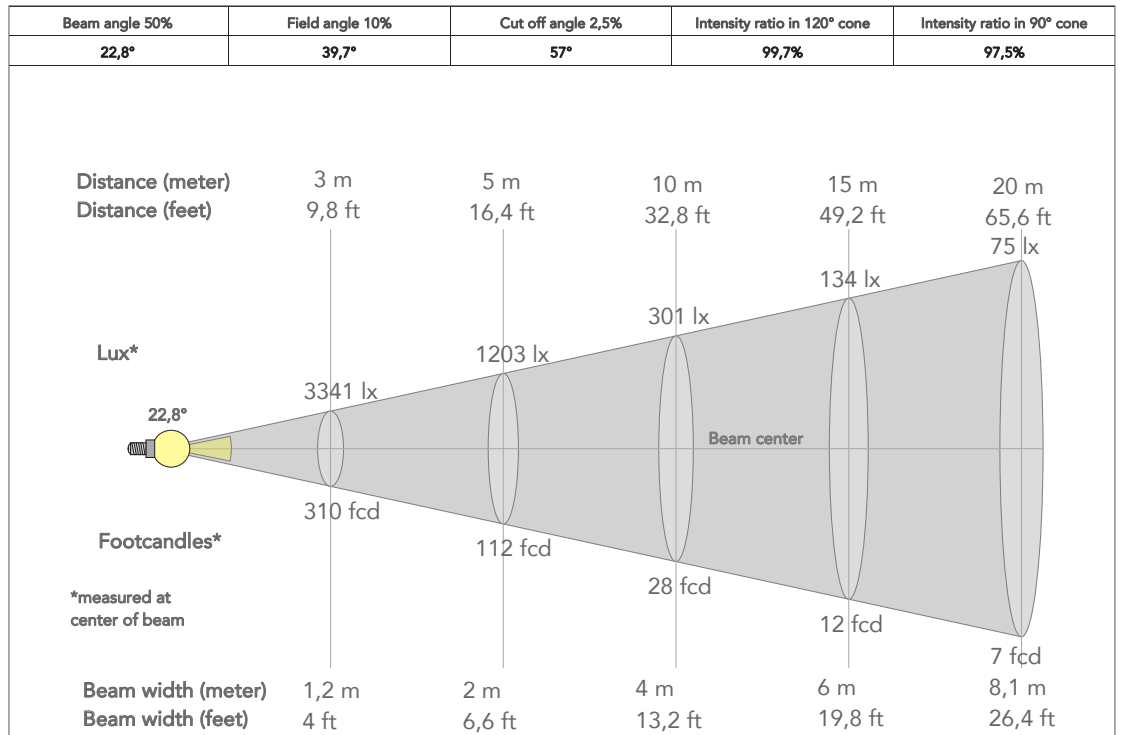


**PRESET FULL ON**

Beam angle 50%: 45°

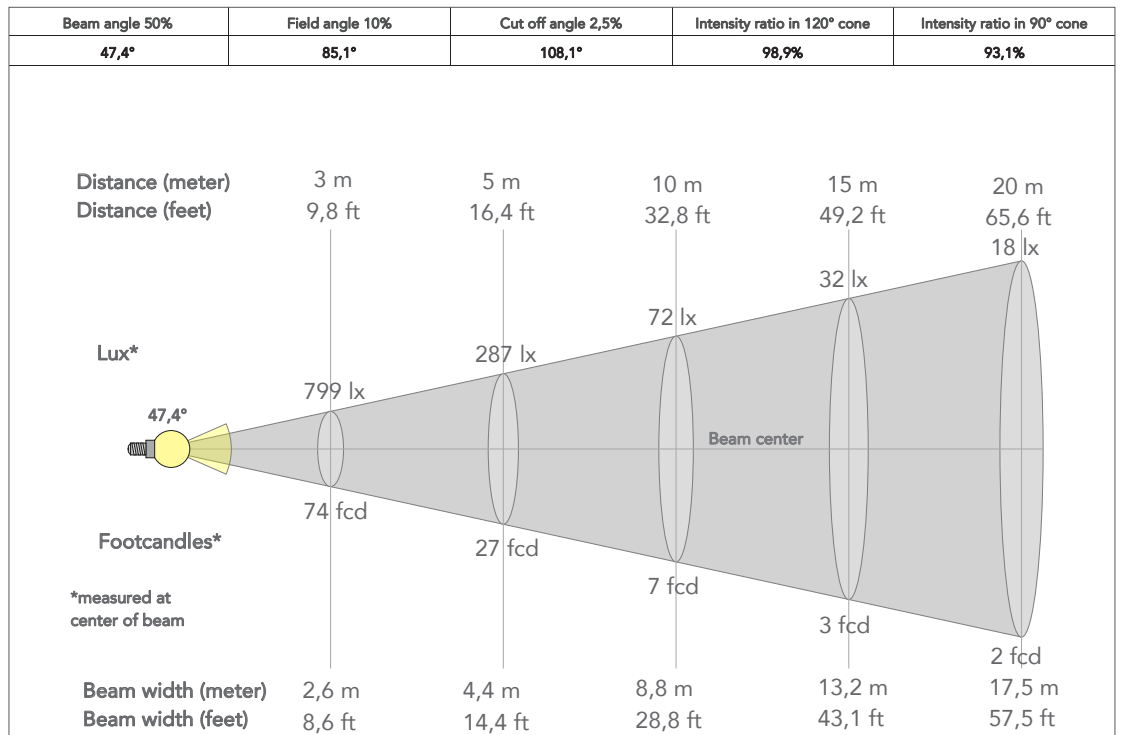

**TECHICAL DRAWINGS**

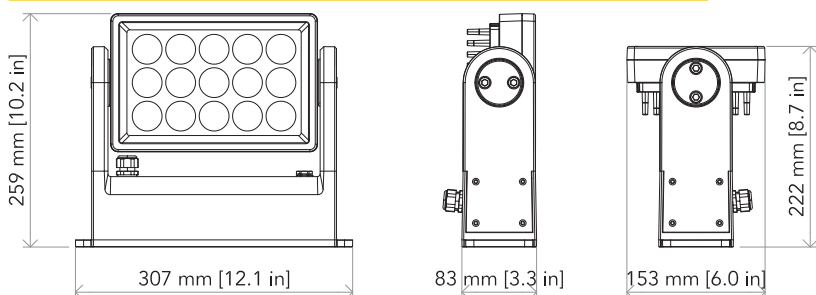

For more product info and downloads visit our website

